


PRODUCT DESCRIPTION

- » Optimal running smoothness due to hard turned shanks
- » Cylindrical design
- » With Balluff chip hole

APPLICATION

- » For clamping screw-in milling cutters

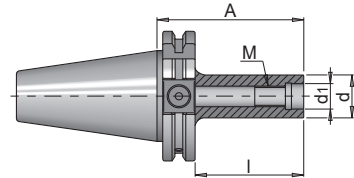

A	d	d1	Interface	M	l	No.	EUR
44	10	6.5	SK 40	M6	25	HWZ 2249/SK40/ 6/ 25	<>
69	13	8.5	SK 40	M8	50	HWZ 2249/SK40/ 8/ 50	<>
94	13	8.5	SK 40	M8	75	HWZ 2249/SK40/ 8/ 75	<>
69	18	10.5	SK 40	M10	50	HWZ 2249/SK40/10/ 50	<>
94	18	10.5	SK 40	M10	75	HWZ 2249/SK40/10/ 75	<>
69	21	12.5	SK 40	M12	50	HWZ 2249/SK40/12/ 50	<>
94	21	12.5	SK 40	M12	75	HWZ 2249/SK40/12/ 75	<>
69	29	17	SK 40	M16	50	HWZ 2249/SK40/16/ 50	<>
94	29	17	SK 40	M16	75	HWZ 2249/SK40/16/ 75	<>